

LOW SPIN WASHERS

MODELS RS-11/14/19 T2

T2 CONTROL



User friendly and totally programmable 7" touch screen
29 preset programs
USB Connection. PC software free of charge for programming, traceability, data analysis...
Videos on display (ads, instructions)
37 languages
8 dosing signals as standard

G FACTOR

High G-FACTOR of 200



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



EFFICIENCY



Intelligent Weighing System
Optimal KG
Water Recovery tanks ready: SAVETANK
Low water consumption

VERSATILITY



Make to order: customisation
OPL < > COIN
Electric < > Hot water
Drain valve < > Pump
Wet cleaning features

ERGONOMICS



Biggest door diameters: Ø373 (RS-11/14) and Ø460 (RS-19)
Easy opening/closing system for door lock

MAINTENANCE



Hinged panel: easy access to parts
Equivalent parts for all models: contactors, electronic devices, gear
Technical menu: traceability, error diagnosis

OTHERS




Grey skinplate outer casing. Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments
Electronic control of imbalance with frequency control
LOADING AID feature: water and rotation control
CE, WRAS and EAC approved product.
Option ETL



OPTIONS

- Double drain
- External double drain 3" (recommended for RS-11/14)
- Normally closed valve
- Recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- Communication PrimerLINK
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- AISI 304 Stainless steel outer casing
- AISI 304 Stainless steel front panel
- SLUICE: model with 8mm holes in the drum
- Anchoring base
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Delayed door opening in case of power outage

TECHNICAL DATA	UNIT.	RS-11 T2	RS-14 T2	RS-19 T2			
DRUM							
Load capacity 1:9 / 1:10	Kg	11/10	14/13	20/18			
Volume	l	100	130	180			
Diameter	mm	620	620	700			
Depth	mm	330	430	470			
GENERAL DETAILS							
Washing speed / Spinning speed	r.p.m.	53/759	53/759	50/714			
G Factor	-	200	200	200			
Maximum force transmitted	KN	2,0 ±3	2,31 ±4	2,63 ±5			
Frequency-dynamic force	Hz	8,93	8,93	8,42			
Sound level	dB	<70	<70	<70			
Coin laundry version	-	Yes	Yes	Yes			
Doble drain	-	External- Opt	External- Opt	Opt			
Weighing system / Tilting system	-	No/No	No/No	No/No			
SLUICE- Option 8mm holes drum	-	Yes	Yes	Yes			
DOOR							
Height center door/ Height door	mm	570/310	570/310	655/348			
Diameter	mm	373	373	460			
POWER							
Motor	kW	1,1	1,1	2,2			
Electric heating power	kW	6	9	12			
Total electric power (electric model)	kW	6,25	9,5	12,75			
Total electric power (hw, steam model)	kW	1,1	1,1	2,2			
CONNEXIONS							
		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
Tension 230V- I + N + T	Nº x mm2 / A	3 x 4 / 32A	3 x 1,5 / 6A	3 x 10 / 50A	3 x 1,5 / 10A	3 x 16 / 63A	3 x 1,5 / 10A
Tension 230V- III + T	Nº x mm2 / A	3 x 2,5 / 20A	-	3 x 4 / 25A	-	3 x 6 / 40A	-
Tension 400V- III + N + T	Nº x mm2 / A	3 x 1,5 / 10A	-	3 x 1,5 / 16A	-	3 x 2,5 / 20A	-
Steam inlet	inch	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Max. steam consumption (steam model)	Kg/h	7	8,5	12	12	12	12
Water inlet	inch	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Water main pressure	Kgs/cm²	2-4	2-4	2-4	2-4	2-4	2-4
Maximum water consumption	Lit/h	61,5	78,8	120	120	120	120
Drain	mm/inch	3"	3"	3"	3"	3"	3"
Drain capacity	Lit/min	200	200	200	200	200	200
DIMENSIONS / PACKING DIMENSIONS							
Widht / Widht	mm	719/800	719/800	788/840			
Depth / Depth	mm	684/990	830/990	840/1.010			
Height / Height	mm	1.158/1.350	1.158/1.350	1.307/1.500			
Net weight / Gross weight	kg	217/225	239/247	281/301			
Volume	m3	1,07	1,07	1,3			

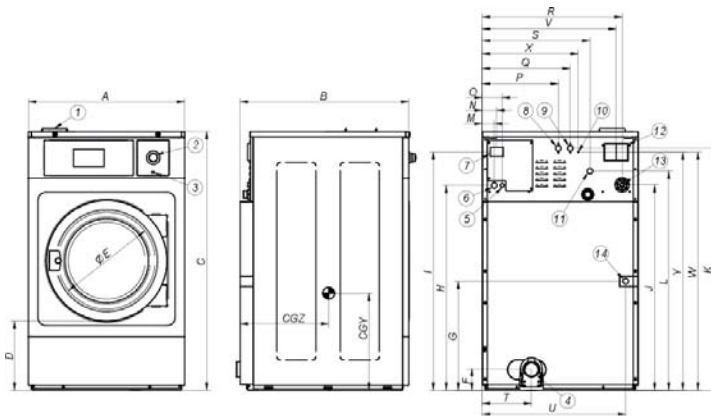

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
RS-11 T2	719	684	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.073	424	1.118	383	511
RS-14 T2	719	830	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.073	424	1.118	484	524
RS-19 T2	788	840	1.307	348	460	108	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.203	485	1.202	479	546

